

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

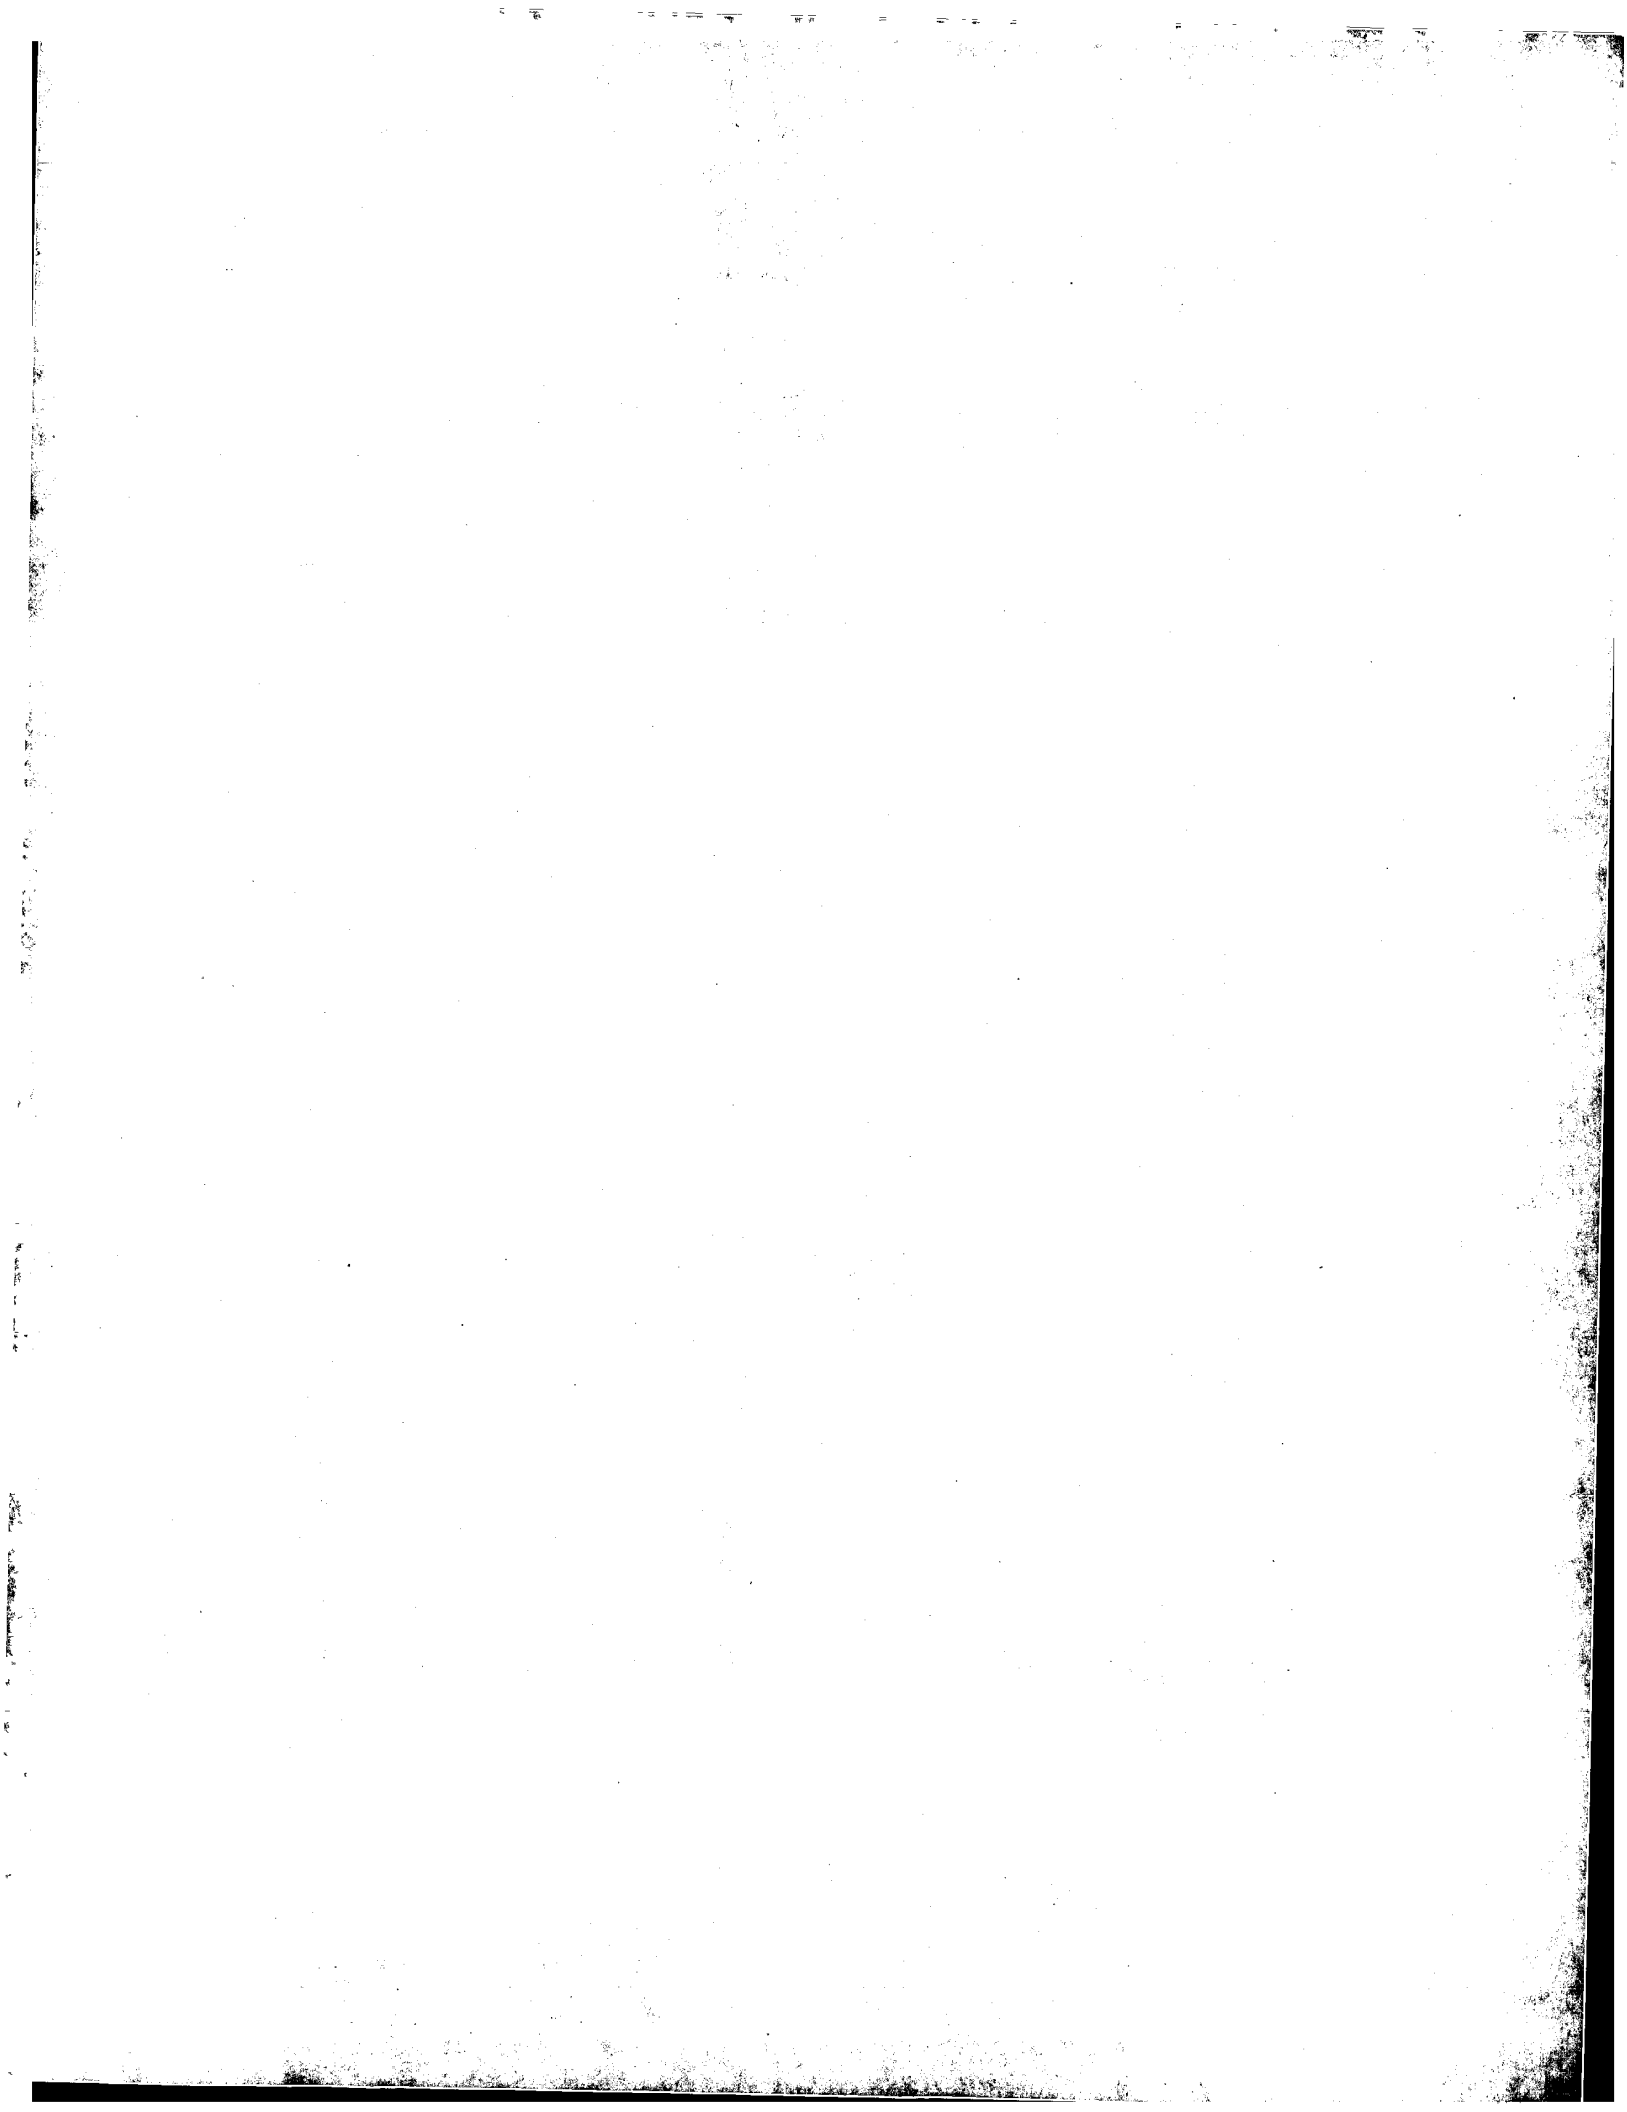



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No. 9821.00

Application of

John Peebles et al.

Serial No. 10/691,217

Filed: **October 22, 2003**

For: **MEDIA STORAGE**

**CLAIM FOR BENEFIT OF
EARLIER-FILED FOREIGN
APPLICATION**

JAN 28 2004

Group Art Unit: **2876**

Examiner: **Unknown**

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner for Patents, PO Box 1450, Alexandria VA 22313-1450 on JAN 28 2004 (Date of Deposit).



Shirley Doll

Commissioner for Patents
PO Box 1450
Alexandria, VA 22313-1450

Sir:

Applicants wish to claim the benefit of the filing date of the earlier G.B. Application Serial No. **0225596.6**, filed on **November 2, 2002**, recited in the Declaration under the provision of 35 U.S.C. 119, and accordingly, Applicants submit herewith a certified copy of said application.

Respectfully submitted,



Michael Chan

Reg. No. 33,663

Attorney for Applicant(s)

NCR Corporation, Law Department, WHQ5E
1700 S. Patterson Blvd., Dayton, OH 45479-0001
Tel. No. 937-445-4956/Fax No. 937-445-3733





INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Stephen Hordley

Dated

8 October 2003

Patents Act 1977
(Rule 16)



04NOV02 E760637-1 D02073
P01/7700 0.00-0225596.6

Statement of inventorship and of right to grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales NP9 1RH

1. Your reference

9821

02 NOV 2002

2. Patent application number
(The Patent Office will fill in this part)

0225596.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NCR INTERNATIONAL, INC
1700 SOUTH PATTERSON BOULEVARD
DAYTON, OHIO 45479
UNITED STATES OF AMERICA

Patents ADP number (if you know it)

7409352001

If the applicant is a corporate body, give the country/state of its incorporation

INCORPORATED IN THE STATE OF DELAWARE

4. MEDIA STORAGE

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

B WILLIAMSON
INTERNATIONAL IP DEPARTMENT
NCR LIMITED
206 MARYLEBONE ROAD
LONDON NW1 6LY

Patents ADP number (if you know it)

7791767001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country Priority application number
(if you know it)

Date of Filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description
Claim(s)
Abstract
Drawing(s)

18

4

1

3

+3

John

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Christine Sheppard

Date

28/10/2002

12. Name and daytime telephone number of person to contact in the United Kingdom

CHRISTINE SHEPPARD
020 7725 8379

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE
1

MEDIA STORAGE

The present invention relates to an apparatus for storage of media, for example, banknotes, cheques, envelopes, and the like. Further aspects of the invention
5 relate to self service terminals (SSTs) incorporating such a media storage apparatus. Aspects of the invention also relate to a media loading device for use with an apparatus for storage of media.

Self service terminals (SSTs), such as automated
10 teller machines (ATMs), are commonly used by customers to make deposits into bank accounts. These deposits may take the form of cash such as banknotes, or cheques, and may be deposited loose, or within an envelope or the like. Each of these forms of deposit will be termed 'media'. SSTs may
15 also accept media deposits for other transactions; for example, to accept payment for goods or services.

SSTs which accept media deposits must be able to store the deposits securely until such time as an authorised operator may attend the SST to remove any deposited media.
20 This means that the SST must be sufficiently large to accommodate the volume of media which is likely to be deposited between operator attendances. However, there is also a pressure for the SST to be as small as practical,

since SSTs with a large footprint will decrease available space for other facilities to be available to customers.

Conventional media deposit handling systems operate by means of gravity-assisted delivery of media to a secure container. When media is deposited into the SST by a customer, the media is received in a bunch note acceptor module, which feeds bundles of media vertically, short edge leading, through an opening in the top of a security enclosure into a removable container within that area. The delivery is purely gravity dependent on entry into the container. This has the result that media items accumulate essentially randomly in an unordered fashion within the container, leading to an inefficient packing and use of space within the container. The capacity of the container is therefore significantly less than may be achieved by more efficient packing means.

It is among the objects of embodiments of the present invention to obviate or alleviate these and other disadvantages of known media deposit handling systems.

According to a first aspect of the present invention, there is provided a media storage device comprising :

a media container for receiving media items to be stored, the media container comprising media retaining

means for retaining media items received therein in a predetermined orientation;

a media loading assembly positionable before an opening of the container to allow media to be loaded into
5 the container; and

media transfer means for transferring media from the loading assembly to the media retaining means.

This arrangement allows media to be positively transferred into a storage container by a media transfer
10 means, so removing the reliance on gravity assisted delivery. This permits more organised delivery of media into the container, and hence more efficient packing of media into the container thereby increasing capacity. Further, the media retaining means allows media items to be
15 retained in a particular orientation; thus, if the media items are transferred to the media container in a stacked, upright orientation, the media items will remain in this orientation. This also assists efficient packing and storage of media items, so increasing effective storage
20 capacity.

Preferably the media retaining means permits media to pass into the container, while restricting media from passing out of the container the same way. Multiple

retaining means may be provided, dividing the interior of the container into a plurality of connected sections. This arrangement allows media items to be passed into the container, where they accumulate within one of the sections. As the section is filled by the media loading means, media items pass from the full section into the next adjacent section. The provision of multiple sections not only retains media items within the container, but also provides restricted spaces for the media items, so reducing the risk of media becoming disarrayed and filling more space than necessary.

The media retaining means may comprise resilient flaps, fingers, or the like, extending into the interior of the container. The flaps are conveniently resilient enough to be deformed by the media transfer means or by a bundle of media passing therethrough, yet strong enough to resist media deforming the flaps when not being pushed. Alternatively, hinged panels or other one-way arrangements may be used. A further alternative retaining means is a sprung plate or the like, which urges against stored media items to retain the items in the desired orientation, although such a retaining means does not provide one-way entry of media items into the container. A combination of

types of retaining means may be used - for example, resilient fingers along the length of the container, together with a sprung plate at the rear of the container.

Preferably the media loading assembly further
5 comprises coupling means for coupling a drive means to the media transfer means, arranged to multiply linear movement of the drive means, such that a particular linear movement of the drive means results in an increased linear movement of the media transfer means. The coupling means thus
10 magnifies any movement of the drive means to permit the media transfer means to be moved further for a given drive. This has the advantage that the media loading assembly may be shallower than would otherwise be possible; using a direct linkage between the drive means and the media
15 transfer means requires a deeper loading assembly, so reducing the storage space available for media. If a shallower loading assembly is nonetheless used, the transfer means is unable to transfer media as effectively, leading to reduced ordering of the media, and a less
20 efficient packing; thus the effective media storage volume is reduced.

Preferably the coupling means comprises an extending arm pivotally mounted to define forward and rearward

portions, the forward portion being connected to the media transfer means, with the pivotal mounting being linearly movable by a drive means. The extending arm may be directly mountable to a drive means, or may be indirectly mountable thereto. Preferably the media loading assembly further comprises means for limiting forward movement of the rearward portion of the extending arm. This causes the extending arm to move forward with a drive means until the limiting means is activated, whereupon the extending arm pivots on the pivotal mounting, so continuing to urge the media transfer means forward to a greater extent than the drive means will move linearly. The means for limiting movement of the extending arm may comprise a stop against which a corresponding protrusion from the extending arm may abut. Conveniently the stop may be in the form of the end of a track or opening within which the protrusion may run. The protrusion may take the form of a pin passed through the extending arm. Where multiple extending arms are present, the pin may pass through two or more of the extending arms.

Preferably the coupling means comprises a plurality of extending arms; preferably each extending arm is paired with a corresponding extending arm having a different

orientation. That is, two extending arms may be provided which cross one another; this provides a 'scissor'-like action when the pusher means is extended. Extending arms, or extending arm pairs, may be provided to either side of the media loading assembly.

Preferably the media transfer means comprises a pusher plate. The pusher plate may be generally sized and shaped to conform to the dimensions of media to be transferred. The plate may preferably be profiled or otherwise shaped to complement a profiled or shaped opening in the media storage container. Where the media container comprises resilient flaps or fingers, then this permits the flaps or fingers to return to their rest position when the pusher means has passed the flaps, so causing media items to remain within the container when the transfer means is retracted therefrom.

Preferably the media storage device further comprises drive means coupled to the media transfer means. Preferably the drive means is a linear drive means. The drive means may comprise for example a piston arrangement or the like. Preferably the drive means comprises a rack and pinion arrangement. Multiple racks and pinions may be used, with the pinions being coupled so as to drive at the same rate.

This allows for smooth movement of the media transfer means. Where multiple pinions are coupled, a single pinion may be driven, with the remaining pinions being coupled to the driven pinion by for example intermediate gearing.

5 Preferably the media loading assembly further comprises means for receiving media on the media transfer means. This may comprise a slot or other opening adjacent the media transfer means. Preferably the means for receiving media permits asymmetric media to be received
10 short edge leading. The media loading assembly may be movable to specifically address a slot or opening, or to address a media container opening as appropriate.

 Preferably the media loading assembly is suitably sized to receive media items therein and to retain items in
15 a desired orientation. For example, where the media to be received comprises banknotes, the media loading assembly may be generally banknote-shaped, in the form of a shallow box. This allows the assembly to receive a bundle of notes and retain them in an upright orientation.

20 Preferably the media container comprises a plurality of media receiving subcontainers. Conveniently the media container and the media loading assembly are relatively movable, to permit the loading assembly to address each

subcontainer separately. This may be achieved by mounting the loading assembly on a drive track. The provision of multiple subcontainers and a movable loading assembly permits media items to be sorted into separate
5 subcontainers; for example, different denominations of banknotes may be delivered to different subcontainers.

Preferably the container further comprises means for permitting access to media therein for unloading of stored media. This may comprise doors, removable subcontainers,
10 hatches, automated unloading mechanisms, and the like.

Preferably the opening of the media container is selectively closable. For example, the opening may be arranged to automatically close when the container is removed from a mounting, or to close when the media loading
15 assembly is not positioned adjacent the container. This allows secure closure of the container for transport, maintenance, and the like, without providing access to the contents to unauthorised individuals. Conveniently the media container may comprise a slidable door closure
20 arranged to close the opening when the media loading assembly is not present.

Preferably the media storage device forms part of a self service terminal. Alternatively, the media storage

device may be a standalone device, or may form part of a media sorting and storage assembly.

According to a second aspect of the present invention, there is provided a media loading assembly for use with a
5 media storage device, the media loading assembly comprising:

media transfer means for transferring media from the loading assembly to a media storage container; and

coupling means for coupling a drive means to the media
10 transfer means, arranged to multiply linear movement of the drive means, such that a particular linear movement of the drive means results in an increased linear movement of the media transfer means.

According to a further aspect of the present
15 invention, there is provided a self service terminal (SST) comprising:

user interaction means for interacting with a user;

media deposit means for receiving media from a user;

a media container for receiving deposited media items,
20 the media container comprising media retaining means for retaining media items received therein in a predetermined orientation;

a media loading assembly positionable before an

opening of the container to allow media to be loaded into the container; and

media transfer means for transferring media from the loading assembly to the retaining means.

5 Preferably the media loading assembly further comprises coupling means for coupling a drive means to the media transfer means, arranged to multiply linear movement of the drive means, such that a particular linear movement of the drive means results in an increased linear movement
10 of the media transfer means.

Preferably the user interaction means comprises means for providing information to the user, and means for receiving instructions from the user. The information providing means may comprise a display screen or the like.
15 The instruction receiving means may comprise a keypad, touch sensitive screen, pointing device, or the like.

The media deposit means may comprise a media deposit aperture for receiving media items, and for passing received items to the media loading assembly.

20 These and other aspects of the present invention will now be described by way of example only and with reference to the accompanying drawings, in which:

Figure 1 shows a self service terminal in accordance

with an aspect of the present invention;

Figure 2 shows a media storage device as used in the SST of Figure 1; and

Figures 3 and 4 show the media loading assembly of Figure 2 in more detail, in retracted and extended positions respectively.

Referring first of all to Figure 1, this shows a self service terminal (SST) 10, which includes a data processor unit 12, connected to and controlling a display screen 14 and a data input keypad 16, which are mounted in the fascia of the SST 10. The SST fascia also includes a media dispense slot 18, and a media deposit slot 20. The media dispense slot 18 is connected by a media transport path 22 to a media safe 24, which contains media to be dispensed from the SST. The media deposit slot 20 receives media deposited by a user, and passes it, short edge leading, to a media loading assembly 26. The media loading assembly 26 transfers the media into a media container 28, which may securely store deposited media until the SST may be attended and the media collected by the operator.

The construction and operation of the media loading assembly 26 and media container 28 will now be described in more detail, with reference to Figure 2. The media

container 28 comprises three subcontainers 28a, 28b, 28c, each of which is of suitable height and width to accommodate media items short edge horizontal. Within each of the subcontainers is a series of flexible fingers 30
5 extending into the interior of the subcontainer, and dividing the subcontainer into a number of sections. Each section is deep enough to accommodate a number of media items. The front 32 of each of the subcontainers is open to permit media items to be loaded into the subcontainers.

10 The media loading assembly 26 is mounted on a horizontal rail 34, and may be moved along the rail in order to address each of the subcontainers 28a, 28b, 28c, by means of a motor 36 and drive belt 38. The loading assembly 26 has an opening 40 at the top thereof, allowing
15 entry of media items into the loading assembly. The region into which the media items enter is bounded by a pair of side walls 42, and a bottom plate (not shown), as well as a media pusher plate 44 to the rear. This creates a relatively small volume in which media items will be
20 retained in an ordered manner.

The media pusher plate 44 may be moved backwards and forwards in a manner described below, to push media items from the loading assembly 26 into the container 28. The

pusher plate 44 is profiled in a complementary manner to the fingers 30 of the subcontainers. This allows the plate 44 to pass through the fingers 30 without displacing them when the plate 44 is empty; when the plate is carrying
5 media items, however, the media items will cause the fingers 30 to be displaced. This arrangement results in the media items being able to be passed into the container 28, by displacing the fingers 30, but they will not be able to leave the container 28 by the same route, since the fingers
10 30 will not be displaced by the media items alone in the opposite direction. Further, as media items are loaded into the container, they will push previously-loaded media items farther into the container and into subsequent sections, by displacement of the flexible fingers 30. This allows the
15 media items to be loaded into the container and to be retained in an ordered manner by virtue of the relatively shallow compartments within each of the subcontainers, yet the overall volume of the subcontainer is relatively large, so that many media items may be stored therein.

20 In addition to the flexible fingers 30, the container and media loading assembly may be provided with hinged flaps which are opened by the media pusher plate. This arrangement helps to keep the container and loading

assembly closed when media is not being loaded.

The container may also be provided with a roller door arrangement (not shown in these Figures) which may be slid open or shut by engagement with the moving media loading assembly. When the loading assembly is moved to an extreme side position, the roller door will close the container completely. This allows the container to be removed from the SST without permitting access to the contents. The SST may further be configured to ensure that the roller door is completely closed before allowing access to the interior of the SST; this may be achieved by software control, or mechanical interlocking, or a combination thereof.

The operation and construction of the media loading assembly 26 will now be described with reference to Figures 3 and 4, which show schematically the loading assembly 26 with the pusher plate 44 in retracted and extended positions respectively. The loading assembly 26 includes a series of cogwheels 46, with the lowermost wheel 46 being mounted on a driven square drive shaft 48. All cogwheels 46 are driven from this drive shaft 48. The uppermost and lowermost cogwheels 46 are mounted to toothed racks 50, which will thus be moved backward and forward as the cogwheels are turned. Mounted to the racks 50 is a vertical

plate 52 to which is pivotally mounted a pair of extending arms 54, which themselves carry the pusher plate 44 and are pivotally connected thereto. A corresponding pair of extending arms is provided on the opposite side of the loading assembly.

Defined in the ends of the arms 54 that carry the pusher plate 44 are elongate slots 62. Movable within each of these slots is a pin 64 that is mounted on the pusher plate 44. Defined in the ends of the extending arms 54 which are not secured to the pusher plate 44 are further elongate slots 66, both of which receive a pin 56 that is movable within the elongate slots 66 and an elongate opening 58 defined within a fixed bar 60.

The slots 62, 66 in the extending arms 54 are intended to permit extended movement of the arms 54 and the pusher plate 44. In the fully retracted position (Figure 3), the pins 64 mounted on the pusher plate 44 are at the innermost end of the slots 62, while the pin 56 located within the fixed bar 60 is at a central position within the further slots 66. In the extended position (Figure 4), the pins 56, 64 have moved to the other ends of the slots 62, 66 so permitting additional forward movement of the pusher plate 44, as will be described below.

As the cogwheels 46 are turned to move the racks 50 forward, the vertical plate 52 is moved forward carrying the extending arms 54 and pusher plate 44 with it. The pin 56 also moves forward within the opening 58 in the fixed bar 60, until reaching the forward end of the opening 58. This prevents the rear end of the extending arms 54 from moving further forward, causing the extending arms 54 to pivot on the vertical plate 52, so that the arms 54 extend outward in a scissor-type movement. Further forward movement of the racks 50 causes the pins 64 to be pushed to a forward position in the elongate slots 62, thereby carrying the pusher plate 44 further forward than the vertical plate 52. When the pusher plate is to be retracted, a similar movement occurs.

This arrangement allows a greater forward stroke to be achieved than would be possible with a simple rack and pinion arrangement on its own. The depth of the media loading assembly may therefore be decreased without reducing the size of stroke. The arrangement used is also mechanically reliable, and so unlikely to jam.

It will be understood that, although the loading assembly and storage container have been described herein primarily with reference to self service terminals, they

may be used in other applications in which media storage or sorting is necessary; for example, sorting and storage of mail.

CLAIMS

1. A media storage device comprising :

a media container (28) for receiving media items to be
5 stored, the media container comprising media retaining
means (30) for retaining media items received therein in a
predetermined orientation;

a media loading assembly (26) positionable before an
opening of the container (28) to allow media to be loaded
10 into the container; and

media transfer means (44) for transferring media from
the loading assembly to the media retaining means (30).

2. The storage device of claim 1, wherein the media
15 retaining means (30) comprises resilient fingers extending
into the interior of the container.

3. The storage device of claims 1 or 2, wherein the
media loading assembly (26) further comprises coupling
20 means (52, 54) for coupling a drive means (46, 48, 50) to
the media transfer means (44), arranged to multiply linear
movement of the drive means, such that a particular linear
movement of the drive means results in an increased linear

movement of the media transfer means.

4. The storage device of claim 3, wherein the coupling means comprises an extending arm (54) pivotally mounted to
5 define forward and rearward portions, the forward portion being connected to the media transfer means (44), with the pivotal mounting being linearly movable by a drive means.

5. The storage device of any preceding claim, wherein
10 the media container (28) and the media loading assembly (26) are relatively movable.

6. The storage device of any preceding claim, further comprising drive means (46, 48, 50) for driving the media
15 transfer means (44) forward and rearward.

7. A media loading assembly (26) for use with a media storage device, the media loading assembly comprising:

media transfer means (44) for transferring media from
20 the loading assembly (26) to a media storage container; and coupling means (52, 54) for coupling a drive means (46, 48, 50) to the media transfer means, arranged to multiply linear movement of the drive means, such that a

particular linear movement of the drive means results in an increased linear movement of the media transfer means.

8. A self service terminal (SST) comprising:

5 user interaction means (14, 16) for interacting with a user;

media deposit means (20) for receiving media from a user;

a media container (28) for receiving deposited media
10 items, the media container comprising media retaining means (30) for retaining media items received therein in a predetermined orientation;

a media loading assembly (26) positionable before an opening of the container to allow media to be loaded into
15 the container; and

media transfer means (44) for transferring media from the loading assembly to the media retaining means (30).

9. The SST of claim 8, further comprising coupling
20 means (52, 54) for coupling a drive means (46, 48, 50) to the media transfer means (44), arranged to multiply linear movement of the drive means, such that a particular linear movement of the drive means results in an increased linear

movement of the media transfer means.

10. A media storage device substantially as described
hereinbefore with reference to the accompanying drawings,
5 and as shown in Figure 2 and/or Figure 3 and/or Figure 4.

ABSTRACT**MEDIA STORAGE**

5 A media storage device for use in self service
terminals (SSTs) is described. The storage device comprises
a media storage container 28 including flexible fingers 30
protruding into the interior of the container, and a media
loading assembly 26 including a movable plate 44 which can
10 be operated to transfer media from the loading assembly 26
to the container 28. The flexible fingers 30 serve to
retain stored media in a compact and ordered arrangement,
so improving storage efficiency.

Embodiments of the invention may also include a
15 scissor type arrangement of arms 54 in the loading assembly
26, arranged to increase the effective stroke length of the
movable plate 44 without increasing the required depth of
the loading assembly.

20 **[Figure 4]**

1/3

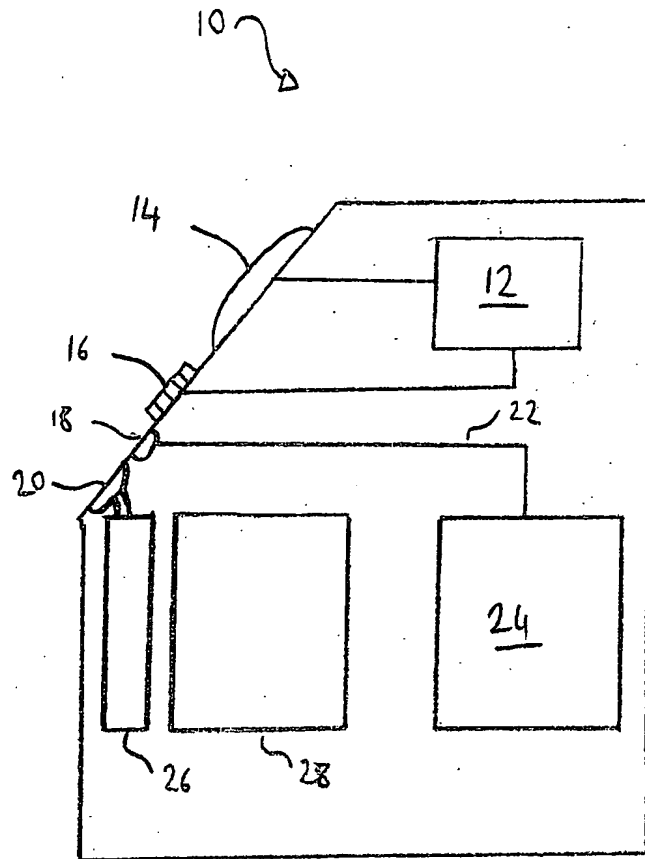
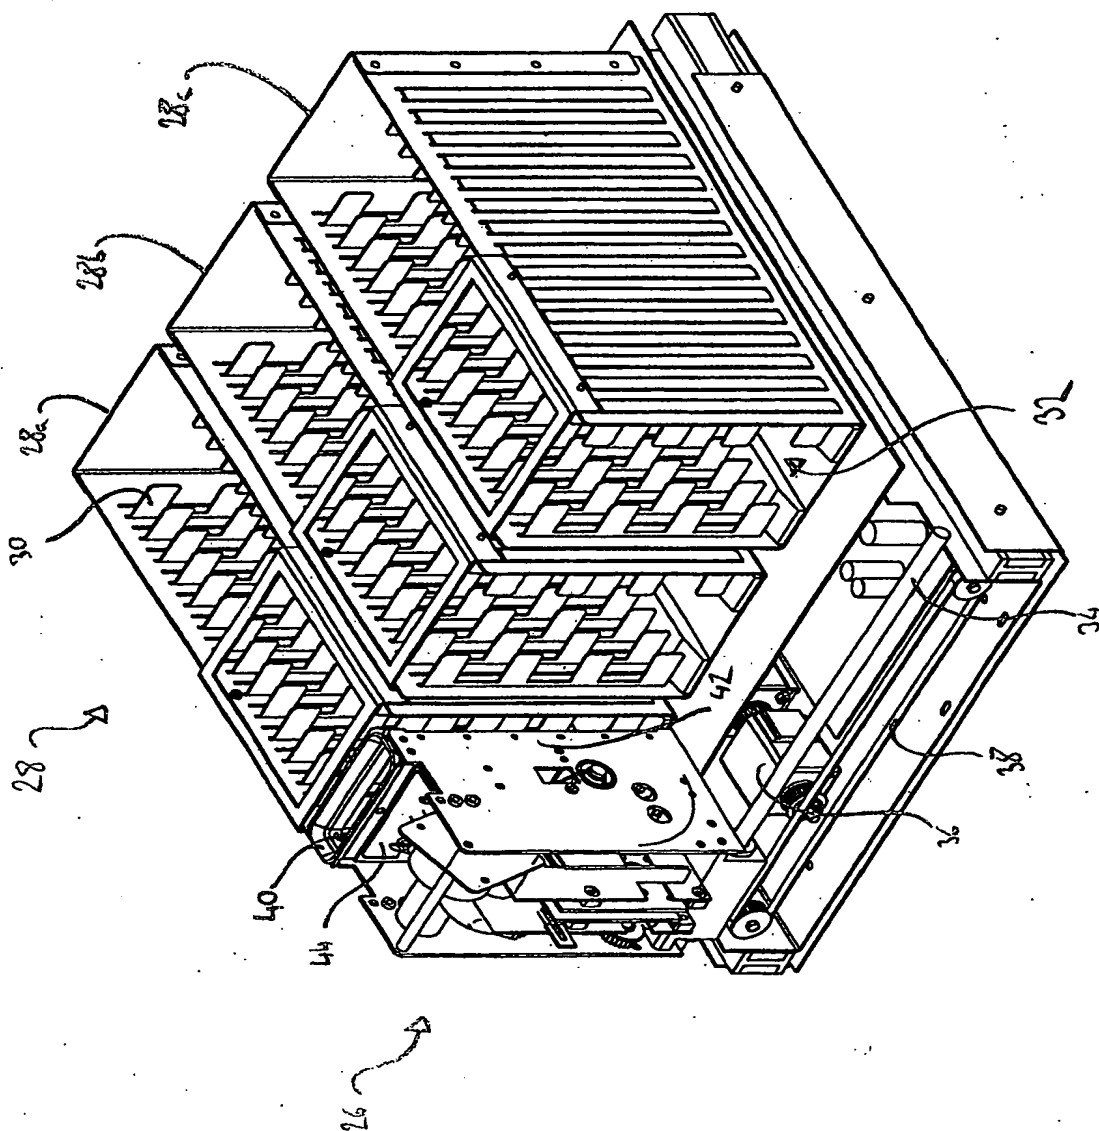


Fig. 1



Fig. 2





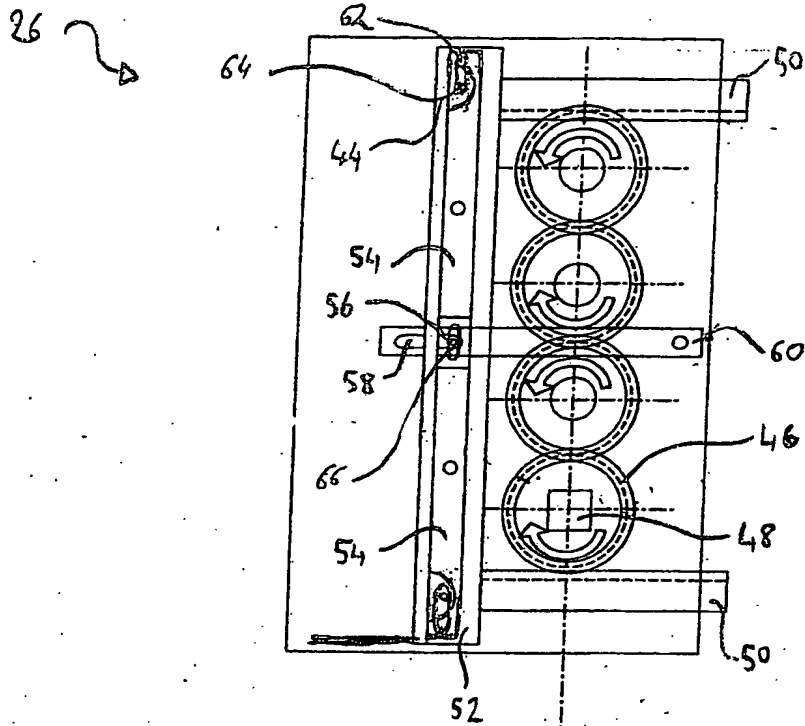


Fig. 3

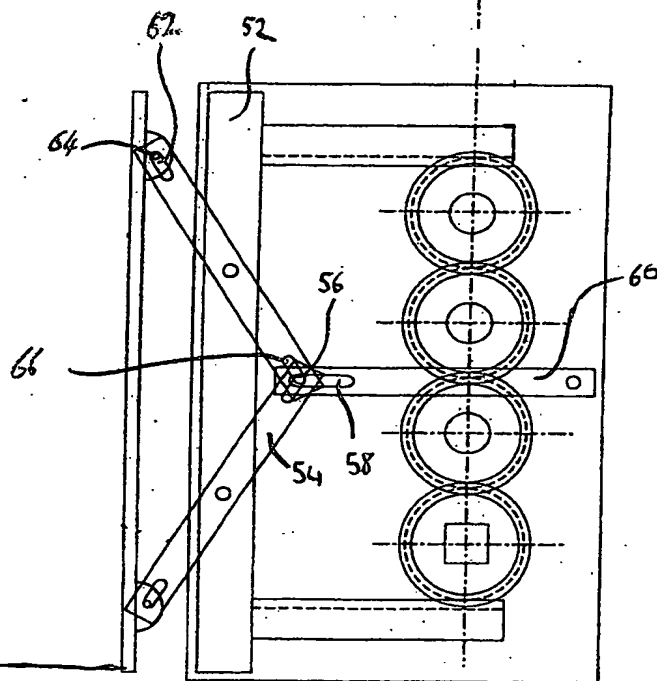


Fig. 4

